




G2RV-SR501 24VAC/DC

Slimline relay 6mm incl. socket, SPDT, 6 A, Push-in terminals, 24 VAC/DC, Test switch

Transparent case	✓
With mechanical indicator	✓
Mounting method	DIN rail
Usage	Interface
Poles	1
Rated carry current	6 A
Coil voltage	24 V
Operation voltage	AC/DC
Contact material	Ag alloy
Contact description	SPDT
Features	LED, Test button
Terminal	Push-in Plus

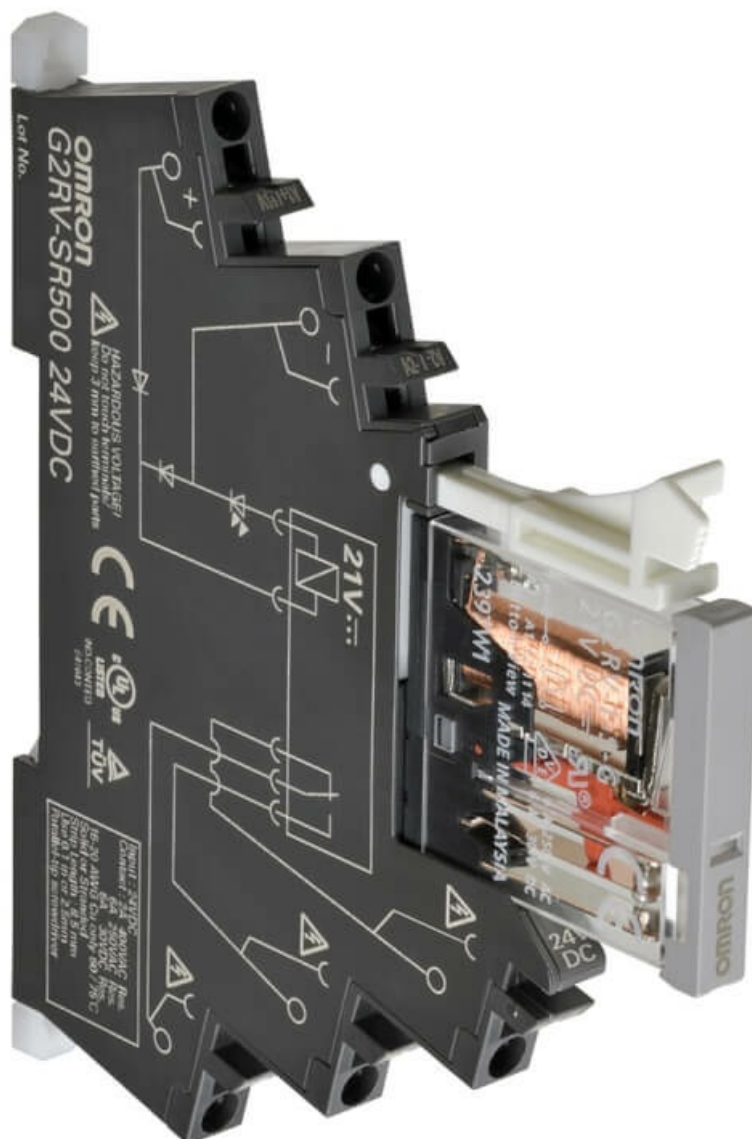

G2RV-1-S-AP-G 21VDC

Slimline input relay (6 mm width), SPDT, 50 mA, for replacement in G2RV-SR***-AP 24DC or 24 VAC/DC



G2RV-1-S-G 21VDC

Relay, SPCO, 6 A contacts, for replacement in G2RV-SR*00 24DC or 24 VAC/DC



G2RV-1-S-G DC11

Relay, SPCO, 6 A contacts, for replacement in G2RV-SR*00 12VDC



G2RV-1-S-G DC48

Relay, SPCO, 6 A contacts, for replacement in G2RV-SR*00 48VAC/DC, 100 VAC, 110 VAC, 200 VAC, 230 VAC



G2RV-1-SI-G 21VDC

Slimline relay (6 mm width), lockable test switch, SPDT, 6 A, for replacement in G2RV-SR701/501 24VDC or 24 VAC/DC

CAD knihovny



G2RV One Minute Sales Presentation

EN PDF 640,9 KB



G2RV-SR Propagační leták

EN PDF 2,6 MB



G2RV-SR/G3RV-SR Slim I/O Relay Katalogový list

EN PDF 10,0 MB



Industrial Relays Brožura

EN PDF 1,9 MB



Panel Building Brožura

EN PDF 3,1 MB



Relay Series Brožura

EN PDF 2,0 MB